

700HZ5

Linkage ball C(M2x4)
球頭C(M2x4)($\phi 5 \times 9\text{mm}$) x 3

Socket button head self tapping screw
半圓頭內六角自攻螺絲(T2.6x12mm) x 12

M2 Nut
M2螺帽 x 3


700HB3A

Socket button head collar screw
半圓頭內六角軸套螺絲(M3x8mm) x 4



CAUTION 注意
Make sure the motor mount is fully fastened before fasten the motor pinion gear mount.
先將馬達固定座鎖緊固定後，再將馬達齒座鎖緊。

Recommend sanding the marked position as below illustration with a waterproof abrasive paper(#800-1000) to avoid the wires of electric parts to be cut.
建議於下圖色塊標示處，使用#800-1000水砂紙打磨，可防止電子設備電線被割破。

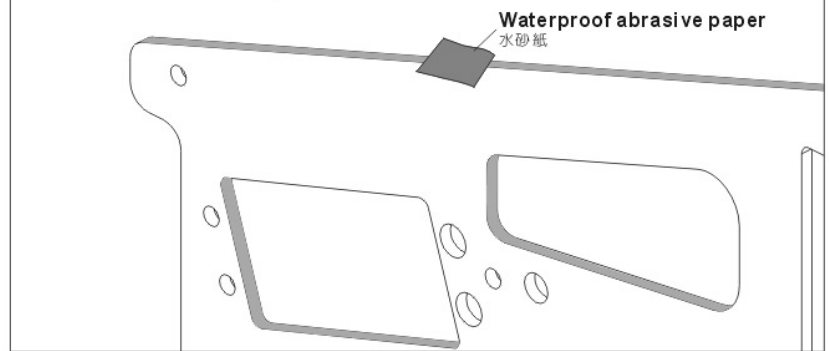

Waterproof abrasive paper
水砂紙

DS610 Digital Servo :

1. 1520 μs standard band / 1520 μs 寬頻系統
2. Stall torque/輸出扭力 : 9.6kg.cm(4.8V)
12.0kg.cm(6.0V)
3. Motion speed/動作速度 : 0.10sec/60 (4.8V)
0.08sec/60 (6.0V)
4. Dimension/尺寸 : 40.3 x 20.1 x 36mm
5. Weight/重量 : 52.2g

DS610 Servo
DS610伺服器

3K CF servo plate
3K碳纖維伺服器板片

Socket button head self tapping screw
半圓頭內六角自攻螺絲
T2.6x12mm

M2 Nut
M2螺帽

CNC Metal servo horn
CNC金屬伺服器舵角片

Linkage ball C(M2x4)
球頭C(M2x4)
 $\phi 5 \times 9\text{mm}$

Socket button head collar screw
半圓頭內六角軸套螺絲
M3x8mm

Socket button head self tapping screw
半圓頭內六角自攻螺絲
T2.6x12mm

Socket button head self tapping screw
半圓頭內六角自攻螺絲
T2.6x12mm

Elevator servo mount
尾舵伺服器座

Linkage ball C(M2x4)
球頭C(M2x4)
 $\phi 5 \times 9\text{mm}$
3K CF servo plate
3K碳纖維伺服器板片


M2 Nut
M2螺帽

DS650 Servo
DS650伺服器

DS650 Digital Servo :

1. 1520 μs standard band / 1520 μs 寬頻系統
2. Stall torque/輸出扭力 : 4.0kg.cm(4.8V)
5.0kg.cm(6.0V)
3. Motion speed/動作速度 : 0.058sec/60 (4.8V)
0.048sec/60 (6.0V)
4. Dimension/尺寸 : 40.3 x 20.1 x 36mm
5. Weight/重量 : 56g

Servo extension cable
伺服器延長線



For extend the rudder servo signal cable.
尾舵伺服器訊號線延長用



CAUTION 注意
3G Flybarless system uses inner hole(A)
Flybar system uses outer hole(B)
3G無平衡翼系統使用內孔(A)
有平衡翼系統使用外孔(B)

Apply a little amount of T43 thread lock when fixing a metal part.
螺絲鎖附於金屬件請使用適量T43(螺絲膠)